




# SPECIFICATIONS

Battery Voltage	3.6V
Battery Capacity	19000 mA
Battery Type	"D" Size Non-Rechargeable LiSoCl <sub>2</sub>
Battery Life	Up to 5,000 Transmissions*
Product Warranty	5 year warranty
Pulse Inputs	-0.3v to 3.5v - Max Pulse Rate: 1000Hz
Protocols	MQTT, MQTTS
Certification	RoHS, RCM, CE & FCC
Platform Supported	Platform Agnostic
GPS	No
LTE Antenna	Internal
IP Rating	IP68
Log Interval - Min	10 seconds
Send Interval - Min	5 minutes
Operating Temperature	-20°C to 70°C
Unit Dimensions	75 x 95 x 50 mm (HxWxD)

# DIMENSIONS

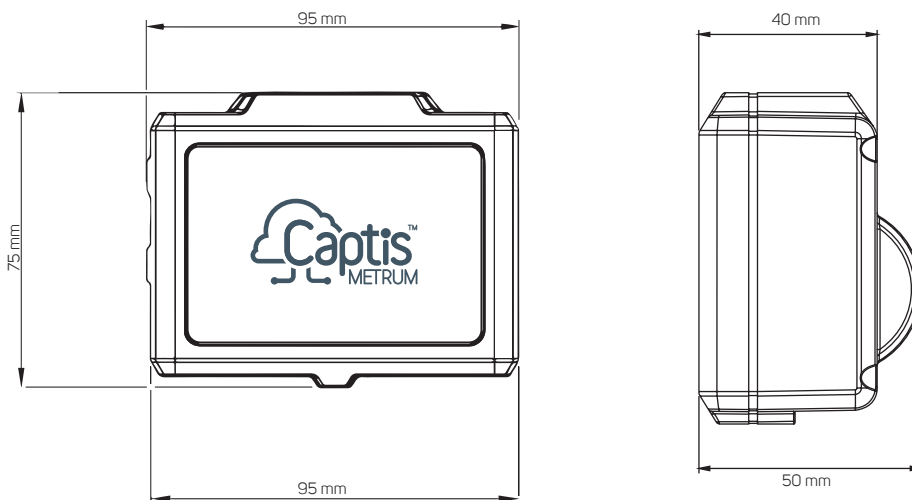

\* Battery life of <5,000 transmissions based on; an average signal strength of -96dB (RSRP), 15 minute data logging frequency, normal payload of ~ 20KB. Other considerations affecting battery life; use of multiple sensors and connected power requirements, use of multiple sensors can increase data payloads and transmission times, higher logging frequencies due to more frequent powering of sensors and larger data payloads.